

350/400 Watt Pulse Start Lamp

23589

DATA SHEET

UNI-FORM PULSE START METAL HALIDE LIGHTING SYSTEMS



VENTURE
LIGHTING

UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MP 350W/400W/U/PS/740

GENERAL Characteristics

| | |
|------------------------|-----------------------------|
| Lamp Type | MH Pulse Start Single Ended |
| ANSI Code ¹ | M131/O, M155/O (M135 Comp) |
| Bulb Shape | ED37 |
| Base Type | Mogul (EX39) |
| Bulb Finish | Clear |
| Rated Life (V) | 20000 hours |
| Rated Life (H) | 15000 hours |
| Operating Position | Universal |

ELECTRICAL

| | |
|---------------------------|---------|
| Lamp Watts | 350/400 |
| Lamp Oper. Voltage (Nom.) | 135 |

SUSTAINABILITY

| | |
|---|----|
| Mercury Amount (mg) | 41 |
| Picograms of Hg per Mean Lumen Hour (V) | 58 |

PHOTOMETRIC


| | |
|--|------------------------|
| Initial Lumens / LPW (V) ² | 41000 / 103 |
| Initial Lumens / LPW (H) ³ | 37000 / 93 |
| Lamp Lumen Depreciation (LLD) | .86 (86%) @ 8000 hours |
| Correlated Color Temperature | 4000K |
| Chromaticity Coordinates (CIE-x,y) | .385 .390 |
| Color Rendering Index (CRI) <i>R_a</i> | 68 |

PHYSICAL

| | |
|----------------------------|-----------------------|
| Bulb Diameter | 4.6" (120mm) |
| Max. Overall Length (MOL) | 11.5" (292mm) |
| Light Center Length (LCL) | 7.0" (178mm) |
| Effective Arc Length | 37.2mm |
| Max. Base Temperature (°C) | 210 |
| Max. Bulb Temperature (°C) | 400 |
| Socket Pulse Rating (KV) | 4 |
| Luminaire Type | Open / Enclosed Rated |


NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved 400W electronic ballasts.
- Nominal color temperature rating is based on Vertical ($\pm 15^\circ$) operation of the lamp. Off-vertical positions will result in higher color temperature.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.
- Product may contribute towards satisfying MR-Credit 4 under LEED.
- ¹ Lamp can be operated on 350W or 400W ballast.
- ² When operated on 350W ballast, Initial Lumens / LPW (V): 35000 / 100
- ³ When operated on 350W ballast, Initial Lumens / LPW (H): 31500 / 90






Universal
Any Position

ED37



Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (EX39)

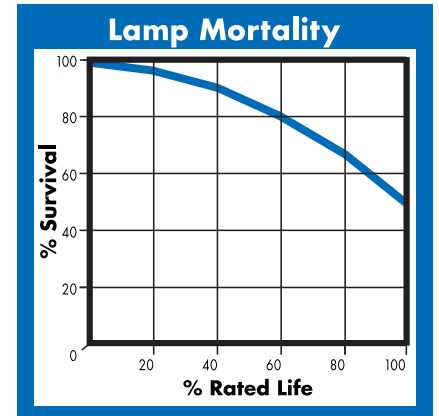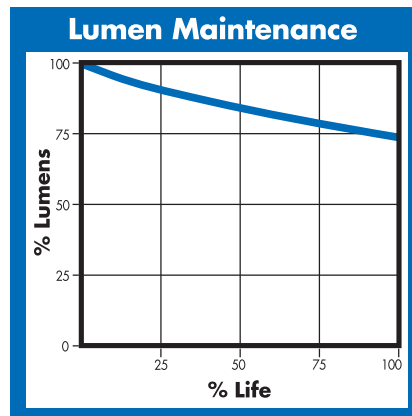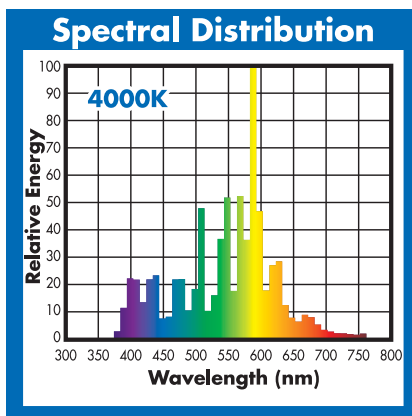

(800) 451-2606

Fax: (800) 451-2605

2451 Enterprise Parkway East

Twinsburg, Ohio 44087 USA

E-mail: venture@adlt.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.