

12/28/2011

4 Lamp  
 Low Ballast Factor High Efficiency  
 Multi-volt  
 High Efficiency

Project:	
Catalog#:	
Approved by:	

### F32T8 Instant Start Parallel Lamp Operation


Lamp Type	No. Of Lamps	Lamp Watts	Line Voltage	Ballast Factor	Input Watts	Input Current (amps)	Power Factor	THD	Ballast Efficacy Factor
F32T8*	4	32	120	0.77	98	0.82	0.98	<10%	0.79
	4	32	277	0.77	96	0.35	0.98	<10%	0.80
	3	32	120	0.82	81	0.68	0.98	<10%	1.01
	3	32	277	0.82	80	0.29	0.98	<10%	1.02
F32T8/ES/30	4	30	120	0.77	90	0.76	0.98	<10%	0.85
	4	30	277	0.77	89	0.33	0.98	<10%	0.86
	3	30	120	0.82	75	0.63	0.98	<10%	1.09
	3	30	277	0.82	74	0.28	0.97	<10%	1.10
F32T8/ES/28	4	28	120	0.77	84	0.71	0.98	<10%	0.91
	4	28	277	0.77	84	0.31	0.98	<10%	0.91
	3	28	120	0.82	70	0.59	0.98	<10%	1.17
	3	28	277	0.82	70	0.26	0.97	<10%	1.17
F32T8/ES/25	4	25	120	0.78	82	0.69	0.98	<10%	0.95
	4	25	277	0.78	81	0.30	0.98	<10%	0.96
	3	25	120	0.84	68	0.57	0.98	<10%	1.23
	3	25	277	0.84	66	0.25	0.95	<15%	1.27
F25T8	4	25	120	0.78	76	0.64	0.98	<10%	1.02
	4	25	277	0.78	74	0.27	0.98	<10%	1.04
	3	25	120	0.84	62	0.53	0.98	<10%	1.35
	3	25	277	0.84	61	0.22	0.95	<15%	1.36
F17T8	4	17	120	0.79	54	0.46	0.98	<10%	1.46
	4	17	277	0.79	52	0.19	0.98	<10%	1.47
F40T8	3	40	120	0.82	98	0.82	0.98	<10%	0.83
	3	40	277	0.82	96	0.35	0.98	<10%	0.85
FB32T8	4	32	120	0.77	98	0.82	0.98	<10%	0.79
	4	32	277	0.77	96	0.35	0.98	<10%	0.80
	3	32	120	0.82	81	0.68	0.98	<10%	1.01
	3	32	277	0.82	80	0.29	0.98	<10%	1.02
FB31T8	4	31	120	0.77	94	0.79	0.98	<10%	0.81
	4	31	277	0.77	92	0.34	0.98	<10%	0.83
	3	31	120	0.82	76	0.64	0.98	<10%	1.07
	3	31	277	0.82	77	0.29	0.97	<10%	1.06
FB28T8	4	28	120	0.77	84	0.71	0.98	<10%	0.91
	4	28	277	0.77	84	0.31	0.98	<10%	0.91
	3	28	120	0.82	70	0.59	0.98	<10%	1.17
	3	28	277	0.82	70	0.26	0.97	<10%	1.17

\* Primary Lamp Design

## Ballast Specifications

- Ballast shall have a five-year warranty
  - Ballast shall be UL certified
  - Ballast shall be sound rated Class A
  - Ballast shall be Class P Type 1 Outdoor
  - Ballast shall have a Lamp Current Crest Factor of <1.7
  - Ballast shall withstand line transients as specified in ANSI C62.41-1991
  - Ballast shall comply with the limits of FCC Part 18 Class A
  - Ballast shall have a lamp operating frequency greater than 40kHz
  - Ballast shall have a 0°F minimum lamp starting temperature for primary lamp
  - Ballast shall be Instant Start
  - Ballast shall be Parallel Lamp Operation
  - Ballast shall have minimum Power Factor of 98% for primary Lamp operation
  - Ballast shall operate within +/- 10% of the ballast specified line voltage at 60 Hz
  - Ballast shall have a maximum case hot spot temperature of 70 Celsius
- Specifications are subject to change without notice.

## Wiring Diagram

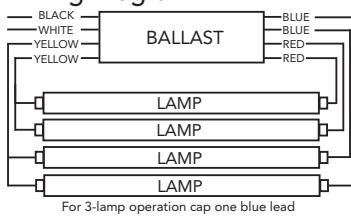

## Dimensions

L: 9.5"  
 W: 1.3"  
 H: 1.0"  
 M: 9.0"

