

**Description:** Magnetic ballast for (1) CFT13W/G23 or (1) CFQ13W/G23 compact fluorescent lamp or (1) F15T8 or (1) F20T12 linear fluorescent lamp

• Line Voltage: 120vac; +/-10%, 60Hz

• Pre-Heat

Model	Lamp	Input Watts	Nominal Line Amps	Starting Current(Amps)	Power Factor	Ballast Factor	Ballast Efficacy Factor	THD	Crest Factor
CF1320H2P	CF13W	15.5	0.24	0.30	> .50	.85	5.48	< 15%	<1.7
CF1320H2P	F15T8	16.5	0.26	0.30	> .60	.75	4.55	< 15%	<1.7
CF1320H2P	F20T12	16.6	0.23	0.30	> .60	.80	4.82	< 15%	<1.7

Application and Performance Specification Information Subject to Change without Notification.

**Performance:**

- Meets ANSI Standard C82.1
- Class P Thermally Protected
- Normal Power Factor

**Safety:**

- No PCB's
- UL listed  
(Class P, Indoor and Type 1 Outdoor)
- CSA Certified (cUL)

**Application:**

- Minimum Starting Temperature: 25° F, -4° C
- Maximum Case Temperature: 90° C
- Sound Rated: A
- Mounting - covered core & coil with multiple mounting



**Physical Parameters:**

- Length: 3.08"
- Width: 1.48"
- Height: 1.30"
- Mounting: 2.68"
- Weight: 0.50 lbs.
- Lead Length: (2)Black 9"/18"
- Can color: White
- Qty/Carton: 72

**Warranty:**

Universal Lighting Technologies warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 24 months from date of manufacture when properly installed and under normal conditions of use. Call **1-800-BALLASTx800** for technical assistance.

**Manufactured in China**

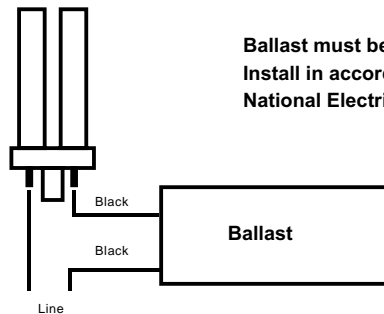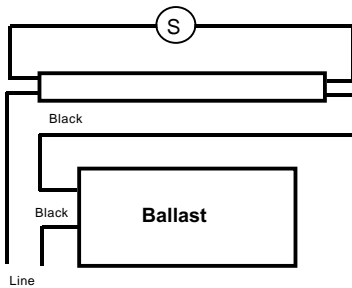

**Ballast must be grounded.  
Install in accordance with the  
National Electrical Code.**