



KTEB-132-1-TP-EMI

T8 ELECTRONIC BALLAST



DESCRIPTION

1 x F32T8 | 120V | Normal Power Factor | Long Case

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD
F32T8	1	120	31	0.45	0.58	1.49	0.88	2.84	150
F25T8	1	120	24	0.36	0.56	1.47	0.92	3.83	150
F17T8	1	120	19	0.29	0.53	1.52	1.05	5.53	150
F15T8	1	120	16	0.27	0.52	1.62	1.05	6.56	150
F40T12	1	120	28	0.40	0.58	1.46	0.78	2.78	150
F34T12	1	120	24	0.34	0.57	1.44	0.80	3.33	150
F30T12	1	120	22	0.33	0.55	1.43	0.80	3.64	150

WIRING DIAGRAMS

F1-7

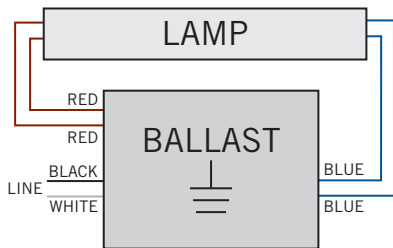




KTEB-132-1-TP-EMI

T8 ELECTRONIC BALLAST

HOT SPOT LOCATION

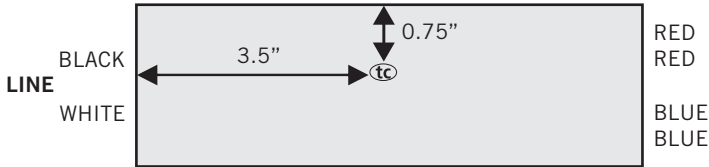

Actual tc point is noted on each ballast label.

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	6.46"
	WIDTH	1.32"
	HEIGHT	1.00"
	MOUNTING	6.00"
	CASE STYLE	L7

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-1-TP-EMI-CP	Carton Pack	TBD	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-132-1-TP-EMI-CP

