

## T1M1UNV0900-40L

#### **SPECIFICATION**



0-10V Dimming

- Built-in LED Driver
- U-OUT 60V
- IP64 Dry or Damp
- Suitable for Class I luminaire

- Universal Voltage:120-277V~,50/60Hz
- Output voltage range of 10-45V---
- Output Power: 40W Max.
- Output Current: 900mA

#### This Driver Will Operate The Following LED Modules:

Any LED module designed to accept input voltage of 10- 45VDC and can operate up to current of 900mA.

### **General Specifications**

Input Voltage	120-277V~, 50/60Hz
Input Current	0.4A Max
Input Power	47W
Power Factor	>0.9
THD	<20%
Efficiency	>85% Typical@277V Full Load
Driver Type	Constant Current
Output Voltage Range	10-45V <del>···</del>
Output Current	900mA
Output Power	40W Max.
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	0-10VDC / 100%-10%
RFI/EMI	FCC Part 15B Consumer, EN55015
Output Type	Class 2,LED Class 2
Sound Rating	_A
Input Surge Protection	Line-Neutral 1kV, Line & Neutral-Ground 2kV
	Input Surge Protection
	Input Current Protection
Protections	Output Short Circuit Protection
	Output Open Circuit Protection
	Overload Protection
Max. Case Temperature	90°C(194°F)
ta	-40°C to 59°C(-40°F to 138.2°F)
Service Life	50,000 hours @Tc 82°C(179.6°F)
Approvals / Class	CE, cURus, Class2, RoHS, IP 64, Dry or Damp Locations, Type HL, Type TL
Warranty	5 years

Figure 1


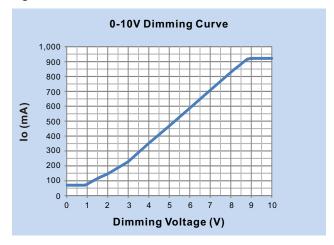


Figure 2



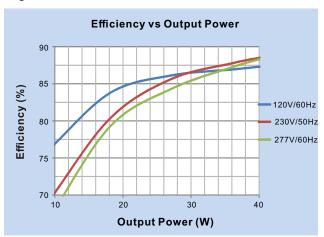

## T1M1UNV0900-40L

#### **SPECIFICATION**



Figure 3

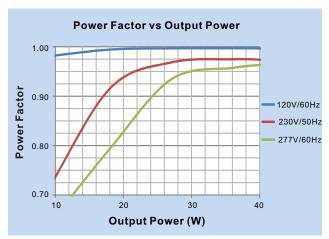


Figure 4

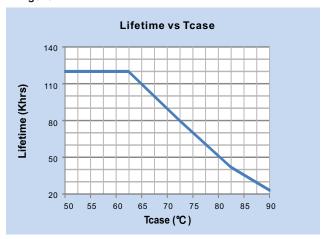


Figure 5



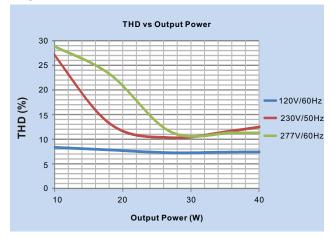


Figure 6

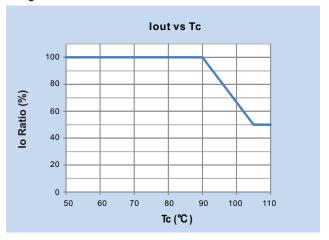

#### **Mechanical Data**

LENGTH	WIDTH	HEIGHT
241mm	33mm	27mm
9 49"	1.30"	1.06"

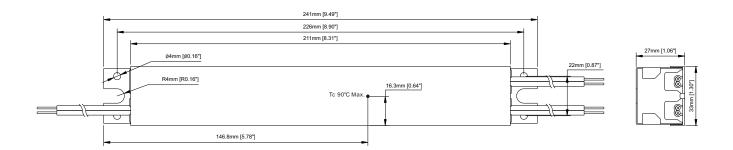

Case Tolerance=±0.02"



# T1M1UNV0900-40L


**SPECIFICATION** 



### **Wiring Diagrams**

INPUT SIDE	LENGTH
BLACK	7.9" [200mm]
WHITE	7.9" [200mm]

OUTPUT SIDE	LENGTH
RED	7.9"[200mm]
BLUE	7.9"[200mm]
PURPLE	7.9" [200mm]
GREY	7.9" [200mm]

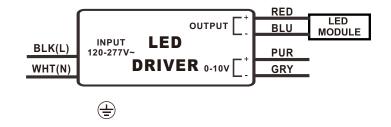

#### NOTE:

1. This Driver Must Be Installed By A Licensed Electrician

2. This Driver Must Be Grounded