

Performance Specifications

Class P

No PCB's

Type 1 Outdoor

Sound Rated Class A

OCV 300V

Lamp End of Life Protection

High Power Factor


Min. Stating Temp : -18°C

Complies with FCC47 CFR part 18 Non consumer limits


80207	DBC218MVRSN
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120V-277V
Input Frequency	50/60Hz

Lamp Type	# Lamps	Lamp Watts	Min.Start Temp	Input Current 120-277V	Input Power	THD	Power Factor	Ballast Factor	Lamp Current Crest Factor	Ballast Efficacy Factor
CFQ18	2	18W	-18°C	0.32/0.14A	38W	<10%	≥0.99	0.98	<1.7	2.57
CFS21	2	21W	-18°C	0.60/0.25A	41W	<10%	≥0.99	0.95	<1.7	2.31
CFQ18	1	18W	-18°C	0.18/0.08A	22W	<10%	≥0.99	1.00	<1.7	4.55
CFS21	1	21W	-18°C	0.21/0.08A	24W	<10%	≥0.99	0.98	<1.7	4.08

Wiring Diagram

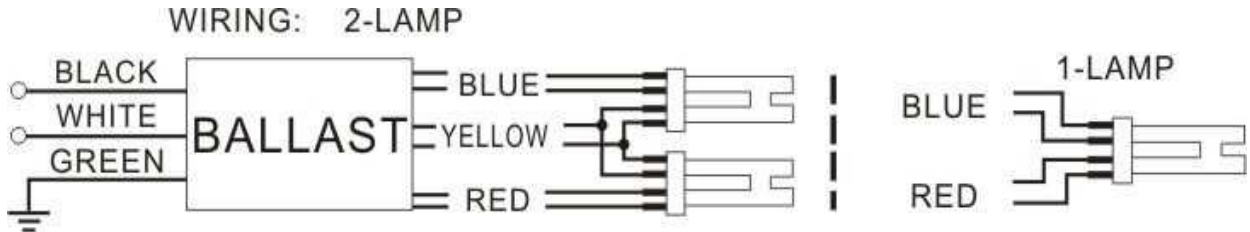

BALLAST DIMENSIONS

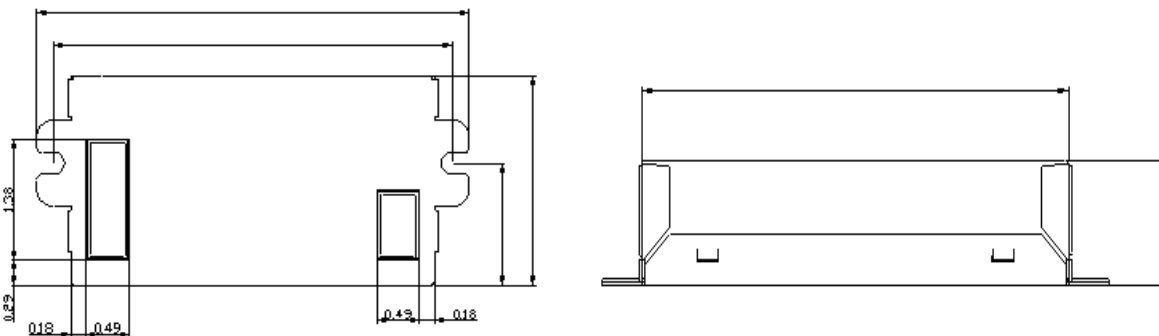

Overall(L)	Width(W)	Height(H)	Mounting(M)
128mm	61mm	26mm	113mm