

Specification Sheet


Catalog Number: 11210-539C-TC
Date: 4/6/99

150W METAL HALIDE

Lamp Type	150W MH
ANSI Designation	M102
Line Voltage	120/277
Regulation	5%
Frequency	60 HZ
Recommended Fuse	10/4
Circuit Type	HX-HPF
Insulation Class	Class A (90°C)
Capacitor Value	INTERNAL
Capacitor Volt Rating	N/A
Capacitor Part Number	N/A
Lamp Starter	INTERNAL

Replaces Catalog #	N/A
Samples Available	Yes
Production Available	YES
Agency Certification	UL & CSA
Maximum Distance to Lamp	20 FEET


Wiring Diagram 34



FEATURES: **Thermally protected**
 Enclosed in fluorescent style ballast can
 Anchor bracket / Tab provided for splice box (SB-4 Not included)

Electrical Characteristics

Line Volt	Power Factor	Line Current in Amps			Input Watts	Open Circuit Volts	Drop Out Volts	Min. Start Temp.	Sound Rating
		Oprtnng	Open	Start					
120	High	1.70	3.70	1.50	185	260	75	-30°C	B
277	High	0.72	1.60	0.70	185	260	160	-30°C	B

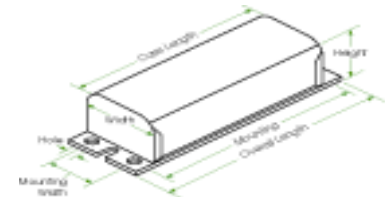

Reference Drawings

Physical Characteristics

Overall Dimensions (In.)				Mounting Holes (In.)			Bracket Mntng Dim		Ballast Net Weight	Lead Length Inches
Length	Width	Height	Case Length	Length	Width	Hole	Length	Width		
14.31	3.19	2.63	13.19	13.75	2.00	0.23	-	-	14.00	12-14

For samples, contact your Universal Lighting Technologies Representative.
 Application and Performance Specification Information Subject to Change without Notification.