

12/28/2011

2 Lamp
Standard Ballast Factor
120-volt

Project:	
Catalog#:	
Approved by:	

Electronic Fluorescent Ballast

T12 High Output Rapid Start Series Lamp Operation


Lamp Type	No. Of Lamps	Lamp Watts	Line Voltage	Ballast Factor	Input Watts	Input Current (amps)	Power Factor	THD	Ballast Efficacy Factor
F96T12/HO*	2	110	120	0.89	195	1.65	0.99	<10%	0.46
	1	110	120	0.90	109	0.92	0.98	<10%	0.62
F96T12/HO/ES	2	95	120	0.89	170	1.44	0.99	<10%	0.94
	1	95	120	1.05	95	0.80	0.98	<10%	1.11
F72T12/HO	2	85	120	0.91	148	1.25	0.98	<10%	0.55
F60T12/HO	2	75	120	1.00	124	1.05	0.98	<10%	0.69
F48T12/HO	2	60	120	1.12	104	0.88	0.98	<10%	1.08

* Primary Lamp Design

Ballast Specifications

- Ballast shall have a five-year warranty
- Ballast shall be UL certified
- Ballast shall be sound rated Class A
- Ballast shall be Class P Type 1 Outdoor
- Ballast shall have a Lamp Current Crest Factor of <1.7
- Ballast shall meet ANSI Standards C82.11-2005 & C62.41-2001
- Ballast shall meet FCC 18 Non Consumer Limits
- Ballast shall have a lamp operating frequency great than 20kHz
- Ballast shall have a -20°F minimum lamp starting temperature for primary lamp
- Ballast shall be potted
- Ballast shall be Rapid Start
- Ballast shall be Series Lamp Operation
- Ballast shall have minimum Power Factor of 99% for primary Lamp operation
- Ballast shall operate within +/- 10% of the ballast specified line voltage at 60 Hz
- Ballast shall have a maximum case hot spot temperature of 85 Celsius

Wiring Diagram

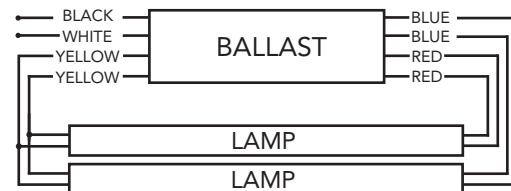

Note: For one lamp operation, cap yellow lead.

Side Ballast View



Bottom Ballast View



Dimensions

- L: 9.5"
- W: 2.3"
- H: 1.6"
- M: 9.0"

• Specifications are subject to change without notice.