



## PRODUCT FEATURES


<b>STARTING METHOD:</b> Rapid	<b>INPUT VOLTAGE:</b> 120VAC $\pm$ 10%	<b>WARRANTY:</b> 3 Years
<b>LAMP CONNECTION:</b> Parallel	<b>INPUT FREQUENCY:</b> 60Hz	<b>POWER FACTOR:</b> Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp end-of-life protected

## ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
FC8T9 + FC12T9	2	120	39.0	0.60	0.54	1.46	0.76	1.95	150	C2-1
FC12T9 + FC16T9	2	120	49.0	0.73	0.56	1.68	0.70	1.43	150	C2-1

## WIRING DIAGRAMS

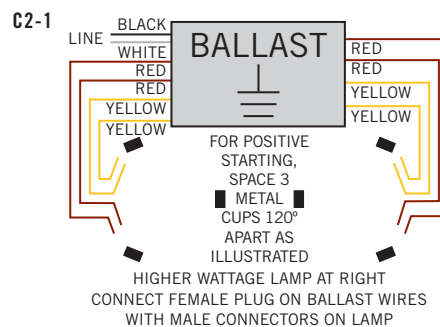




# KTEB-2C72-1-TP-WS

CIRCLINE ELECTRONIC FLUORESCENT

## CASE STYLE/DIMENSIONS

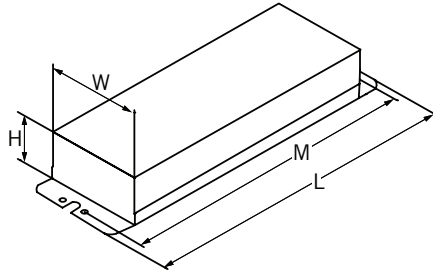

### CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.89"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 0.80 lbs

### STANDARD LEAD LENGTHS\*

BLACK: 12.00"
WHITE: 12.00"
BLUE: 9.00" X 9.00" X 9.00" X 9.00"
RED: 9.00" X 9.00" X 9.00" X 9.00"

\*Consult Keystone for special lead length requirements.

## HOT SPOT LOCATION

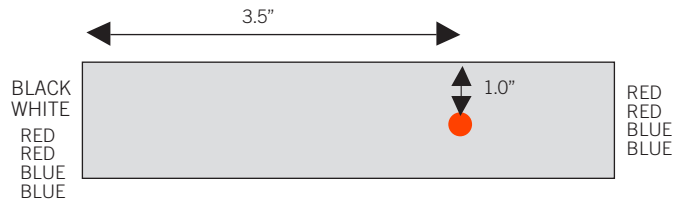

## ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-WS-CP	Carton	50	Quick Ship

## CATALOG NUMBER BREAKDOWN

# KTEB-2C72-1-TP-WS

