

6/19/2012

**70 Watt S62 60Hz  
High Pressure Sodium**

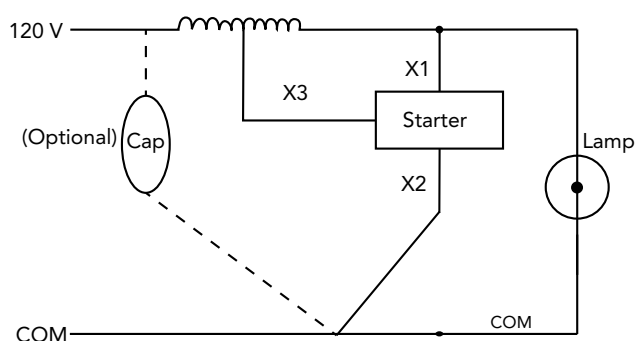
Project:

Catalog#:

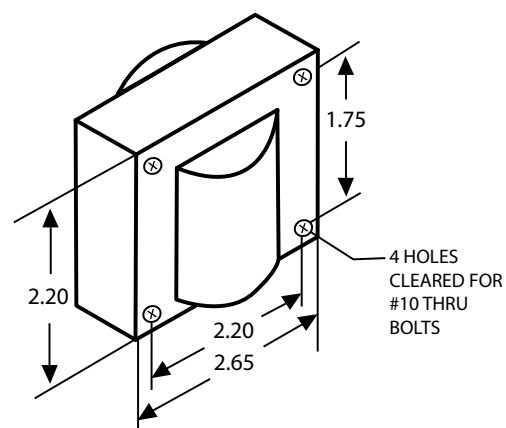
Approved by:

Input Volts (60 hz)	120
Input Watts	80
Approx. Line Current (Amps)*	0.70
Circuit Type	RXH - Reactor High Power Factor
ANSI	S62
Insulation Class	Class H
Power Factor	> 90%
Regulation	Line Volts: $\pm 5\%$ Lamp Watts: $\pm 10\%$
Min. Ambient Starting Temp.	-40°F/-40°C
High Potential Test (Volts)	1 Minute: 1240 1 Second: 1490
Lead Lengths (inches)	12
UL Temperature Ratings*	1029A
Capacitor	Optional; 28.0/120V Min. Included in kit
Starter/Ignitor	ST2001A. Included in kit.

\* See Ballast Label for exact values and additional information

**WIRING DIAGRAM****HID Ballast Kit**

- Ballast
- Capacitor
- Starter
- Mounting Bracket

**DIMENSIONAL DRAWING**

Specifications subject to change without notice.

**c** **AL**<sup>®</sup> **US**