



<b>SS22WSTP</b>	
Ballast Type	Magnetic
Starting Method	Preheat Start
Lamp Connection	--
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC6T9 20W	1	20	0.35	0.458	1.68	0.79	3.95	20
FC8T9 22W	1	19	0.27	0.586	1.58	0.79	4.16	15

**PERFORMANCE:**

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Ballast Case Temperature: 194°F, 90°C


**APPROVALS:**

- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

**PHYSICAL DIMENSIONS:**

Length (L):	3.10"	
Width (W):	1.89"	
Height (H):	1.42"	
Mounting (M)	2.75"	
Lead Length:		
White	12"	
Black	12"	
Blue	9"	
Red	9"	
Yellow	9"	

**WIRING DIAGRAM:**

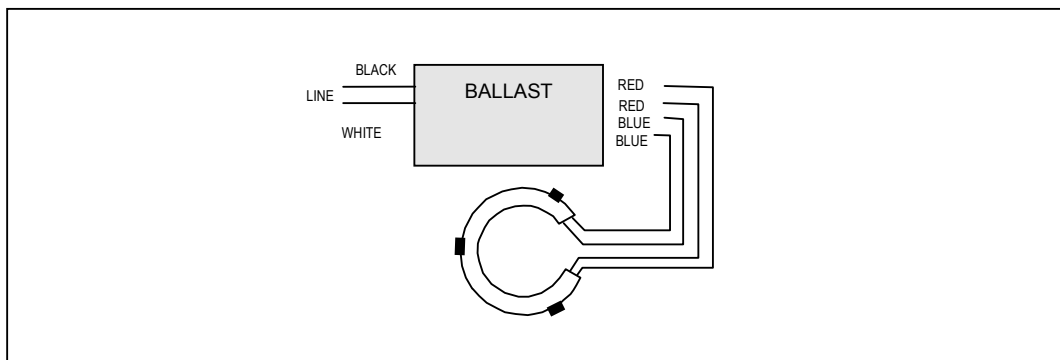

**KEYSTONE TECHNOLOGIES LLC.**  
P.O. Box 246, AMBLER, PENNSYLVANIA 19002  
PHONE: 215-283-2600  
FAX: 215-628-4412  
INFO@KEYSTONEBALLAST.COM  
WWW.KEYSTONEBALLAST.COM