

MSB/0620/24/120

Lamp Type	No. of Lamp	Lamp Footage	Volts	Rated Lamp Watts	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	Ballast Efficacy Factor
F36T12/HO	2	6	120	50	1.41	115	0.87	<45	0.87	0.76
F60T12/HO	4	20	120	75	2.56	300	1.06	<15	0.95	0.35
F72T12/HO	3	18	120	85	2.34	240	0.96	<15	0.99	0.40

Specifications:


- Ballast Type: Magnetic
- Starting Method: Rapid Start
- Lamp Connection: Series
- Input Voltage: 120V
- Input Frequency: 60Hz
- Minimum Starting Temperature: -20°F
- Maximum Ballast Case Temperature: 194°F, 90°C
- OCV: 600V

Approvals:


- UL & cUL 935 (Class P, Outdoor, Type 2)
- Thermally Protected

Dimensions:

Length (L): 11.75"
 Width (W): 3.19"
 Height (H): 2.60"
 Mounting (M) 11.0"

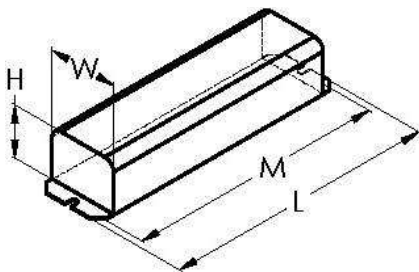

Wiring Diagram:

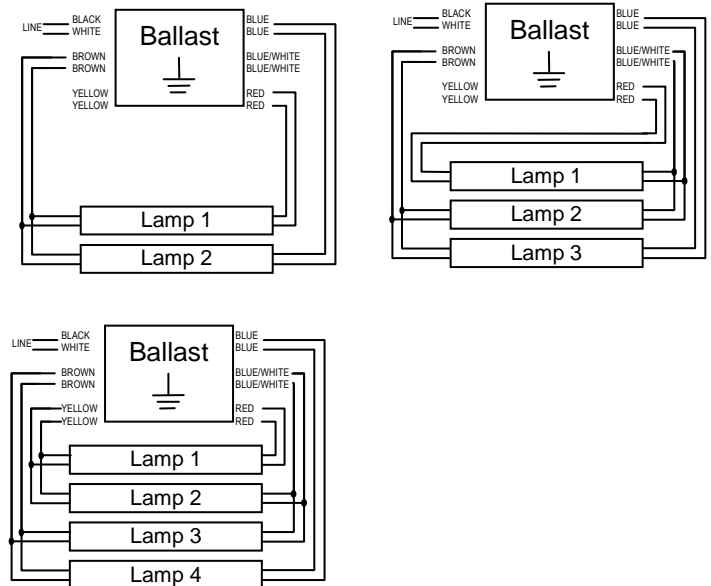

Specifications subject to change without notice

Lighting **for** life.

HOWARD
 LIGHTING PRODUCTS

Visit us online at HowardLightingProducts.com or call us at 800.956.3456.