

MSB/1224/24/120

Lamp Type	No. of Lamp	Lamp Footage	Volts	Rated Lamp Watts	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	Ballast Efficacy Factor
F72T12/HO	2	12	120	85	1.60	170	0.82	<25	0.87	0.48
F72T12/HO	3	18	120	85	2.10	230	0.82	<15	0.96	0.36
F72T12/HO	4	24	120	85	2.70	285	0.84	<10	0.99	0.29

Specifications:


- Ballast Type: Magnetic
- Starting Method: Rapid Start
- Lamp Connection: Series
- Input Voltage: 120V
- Input Frequency: 60Hz
- Minimum Starting Temperature: -20°F
- Maximum Ballast Case Temperature: 194°F, 90°C
- OCV: 785V

Approvals:

- UL & cUL 935 (Class P, Outdoor, Type 2)
- Thermally Protected

Dimensions:

Length (L): 14.31"
 Width (W): 3.19"
 Height (H): 2.63"
 Mounting (M): 13.75"

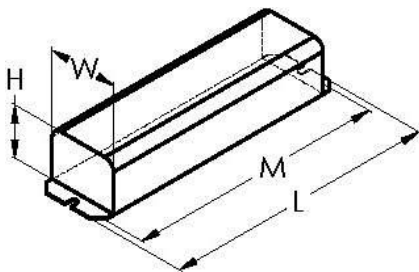

Wiring Diagram:

