


MSB/1240/46/120

| Lamp Type | No. of Lamp | Lamp Footage | Volts | Rated Lamp Watts | Input Current (Amps) | Input Power (Watts) | Ballast Factor | THD % | Power Factor | Ballast Efficacy Factor |
|-----------------------------|-------------|--------------|-------|------------------|----------------------|---------------------|----------------|-------|--------------|-------------------------|
| (2)F96T12/HO + (4)F72T12/HO | 6 | 40 | 120 | 110 + 85 | 3.90 | 415 | 0.78 | <15 | 0.98 | 0.19 |
| F36T12/HO | 4 | 12 | 120 | 50 | 2.40 | 183 | 0.75 | <35 | 0.65 | 0.41 |
| F48T12/HO | 5 | 20 | 120 | 60 | 2.70 | 252 | 0.78 | <20 | 0.82 | 0.31 |
| F72T12/HO | 5 | 30 | 120 | 85 | 3.20 | 350 | 0.77 | <10 | 0.95 | 0.22 |
| F72T12/HO | 6 | 36 | 120 | 85 | 3.50 | 410 | 0.77 | <15 | 0.98 | 0.20 |

Dimensions:

Length (L): 19.19"
 Width (W): 3.19"
 Height (H): 2.69"
 Mounting (M) 18.63"

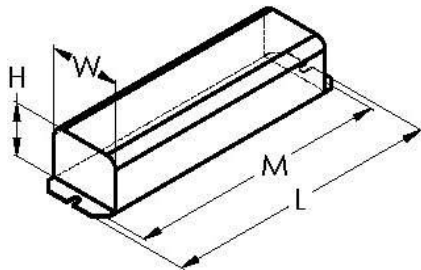

Wiring Diagram:

