

MSB/2040/24/120

Lamp Type	No. of Lamp	Lamp Footage	Volts	Rated Lamp Watts	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	Ballast Efficacy Factor
F120T12/HO	2	20	120	137	2.70	225	0.86	<25	0.78	0.38
F120T12/HO	3	30	120	137	3.10	318	0.82	<10	0.95	0.26
F120T12/HO	4	40	120	137	4.00	412	0.80	<15	0.98	0.19

Specifications:


- Ballast Type: Magnetic
- Starting Method: Rapid Start
- Lamp Connection: Series
- Input Voltage: 120V
- Input Frequency: 60Hz
- Minimum Starting Temperature: -20°F
- Maximum Ballast Case Temperature: 194°F, 90°C
- OCV: 720V

Approvals:

- UL & cUL 935 (Class P, Outdoor, Type 2)
- Thermally Protected

Dimensions:

Length (L): 19.19"
 Width (W): 3.19"
 Height (H): 2.69"
 Mounting (M): 18.63"

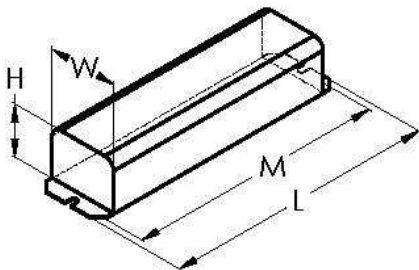

Wiring Diagram:

