

MSB/2448/46/120

Lamp Type	No. of Lamp	Lamp Footage	Volts	Rated Lamp Watts	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	Ballast Efficacy Factor
F72T12/HO	4	24	120	85	3.00	310	0.89	<20	0.85	0.29
F72T12/HO	5	30	120	85	3.20	370	0.89	<10	0.92	0.24
F96T12/HO	5	40	120	110	3.50	470	0.87	<10	0.96	0.19
F96T12/HO	6	48	120	110	4.50	540	0.86	<10	0.96	0.16

Specifications:


- Ballast Type: Magnetic
- Starting Method: Rapid Start
- Lamp Connection: Series
- Input Voltage: 120V
- Input Frequency: 60Hz
- Minimum Starting Temperature: -20°F
- Maximum Ballast Case Temperature: 194°F, 90°C
- OCV: 720V

Approvals:

- UL & cUL 935 (Class P, Outdoor, Type 2)
- Thermally Protected

Dimensions:

Length (L): 19.19"
 Width (W): 3.19"
 Height (H): 2.69"
 Mounting (M): 18.63"

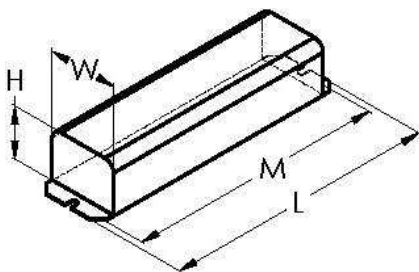

Wiring Diagram:

